


TECHNICAL DATA SHEET



5UB2247-2PC11

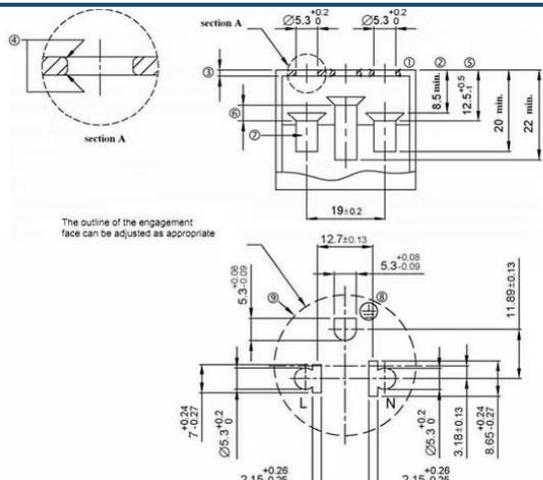

Description: 5UB2247-2PC11

Description: American (ACU) Outlet

Class group: Domestic switching devices

Class: Socket outlet

Number of units: 1

Number of modules (module system): 3

Number of socket outlets switchable: 0

Operation Durability: Tested for 5,000 cycles
(10,000 plug in plug out)

Material: High-quality, flame-retardant
polycarbonate

Applicable Wire Size: 1.5 mm² to 5 mm² (15
AWG to 11 AWG)

Terminal Capacity: Supports Smallest /
largest cross-sectional area (mm²) 1,5 /
2×2,5 (mm²)

Degree of Protection: IPX0

Connection Type: Screwed Terminal

Rated Current (A): 20 A

Nominal Voltage: 250V

Color Variant: White

Device Width: 47 mm

Device Length: 42 mm

Device Depth: 35 mm

Mounting Method: Flush Mounted

Surface Finishing: Gloss Finish

Certification: IEC60884

Siemens DELTA®
realfa 120 Series

Robustness, Everlasting Design

