

PRODUCT DATA SHEET



TECHNICAL DATA

- **Type / Model** : GFCI (Ground Fault Circuit Interrupter)
- **Product Description** : Universal / American Grounding Socket
- **Number of Gang** : 2 Gang
- **Product Type** : Special Outlet
- **Nature of Material** : Polycarbonate Module / Base / Frame
- **Type of Installation** : Flush in Solid Walls
- **Type of Inlets (Outlets)** : American / Universal Socket
- **Rated Voltage** : 230V AC
- **Rated Current** : 16A/20A

- **Rated Residual Operating Current:** $\Delta I_n = 10 \text{ MA}$

- **Frequency** : 50 Hz/ 6-Hz
- **Breaking Capacity** : 2000A
- **Rated Short Circuit Capacity** : 3KA
- **Actuator** : Polycarbonate + GF 20% Actuator
- **Device Mounting**

ADVANCE



Short circuit protection



Overheat protection



Overcurrent protection



Overvoltage protection




Protection against electric shock

PRODUCT DATA SHEET

Warranty:

Five (5) years

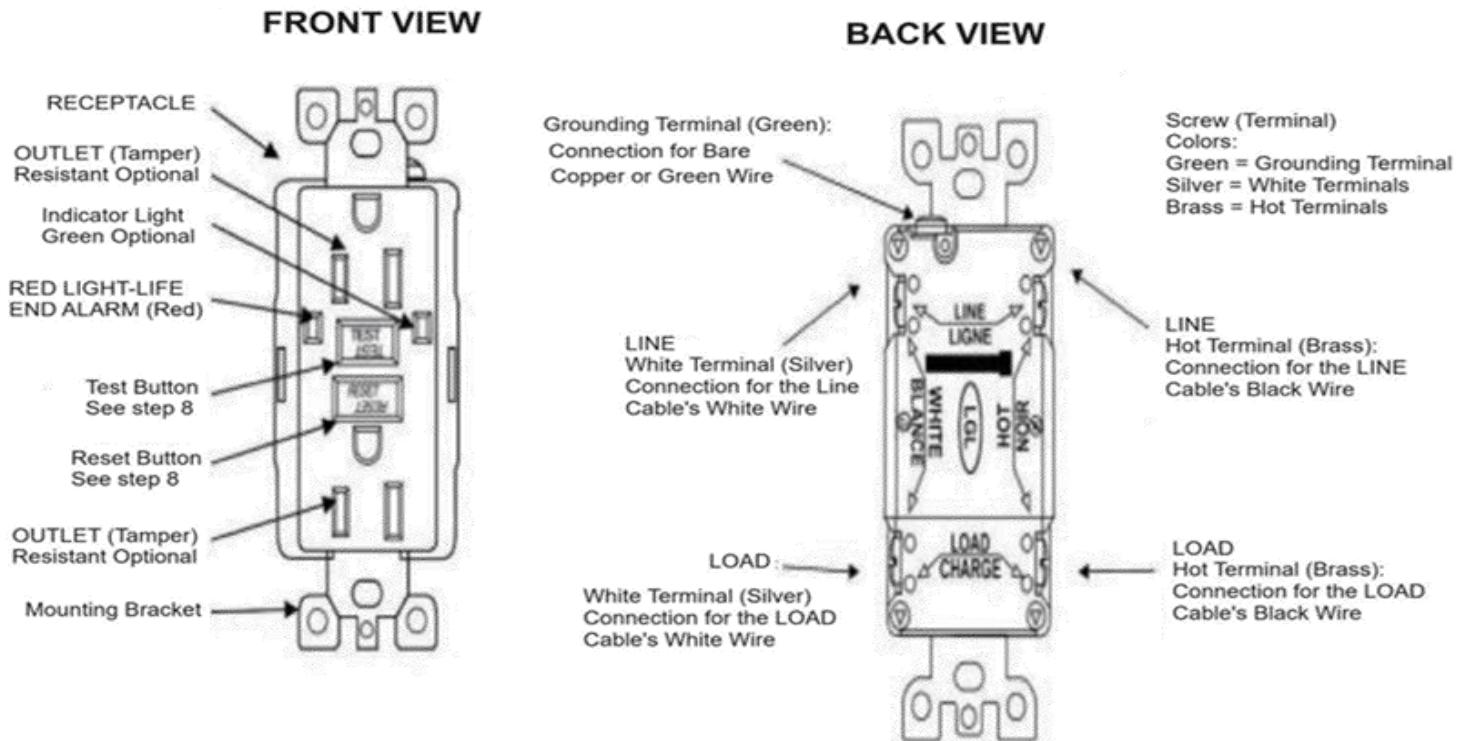

Offer Sustainability:

Sustainability Offer Status: Green Premium Product

Toxic Heavy Metal Free: Yes

Mercury Free: Yes

Environment:

Temperature: -10 to 40°C for Operation

Relative Humidity: 0...95%

Environmental Characteristic: UV Resistant

Standards:

UL 943 - Ground Fault Circuit Interrupter

UL 498 - Standard for Safety for Attachment Plugs and Receptacles

CAN/CSA C22.2 No. 42-10 - General Use Receptacles, Attachment Plugs, and Similar

Wiring Devices

Color: White, & Gray

ADVANCE



Short circuit protection



Overheat protection



Overcurrent protection



Overvoltage protection



Protection against electric shock