


TECHNICAL DATA SHEET



5TA2211-3PC11

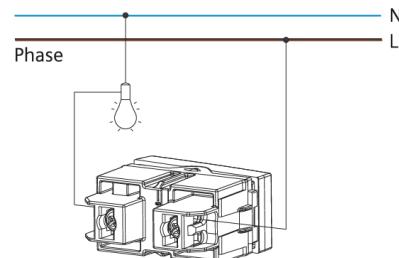

1-way switch

Product Code: 5TA2211-3PC11

Description: 3M SP Switch (1 Way Switch)

Class Group: Switching Devices

Contact opening (gap) : Normal Gap

Wiring system: 3 Way Switch

Method of operation: Rocker/button

Assembly arrangement: Modular device for domestic switching devices

Number of modules (module system): 1

Push button switch: Yes

Number of rockers: 1

Mounting method: Flush-mounted

Operation Durability: Tested for 20,000 cycles (40,000 movements)

Material: High-quality, flame-retardant polycarbonate

Applicable Wire Size: 1.5 mm² to 5 mm² (15 AWG to 11 AWG)

Terminal Capacity: Supports Smallest / largest cross-sectional area (mm²) 1,5 / 2×2,5 (mm²)

Function Lighting: Control & Orientation

Degree of Protection: IPX0

Connection Type: Screwed Terminal

Rated Current (A): 10 A

Nominal Voltage: 250V

Device Width: 70mm

Device Length: 42 mm

Device Depth: 35 mm

Mounting Method: Flush Mounted

Surface Finishing: Gloss Finish

Certification: IEC60669

Siemens DELTA®
realfa 120 Series

Robustness, Everlasting Design

